



[newblinds.co.uk](http://newblinds.co.uk)


# Soft




Soft



newblinds.co.uk




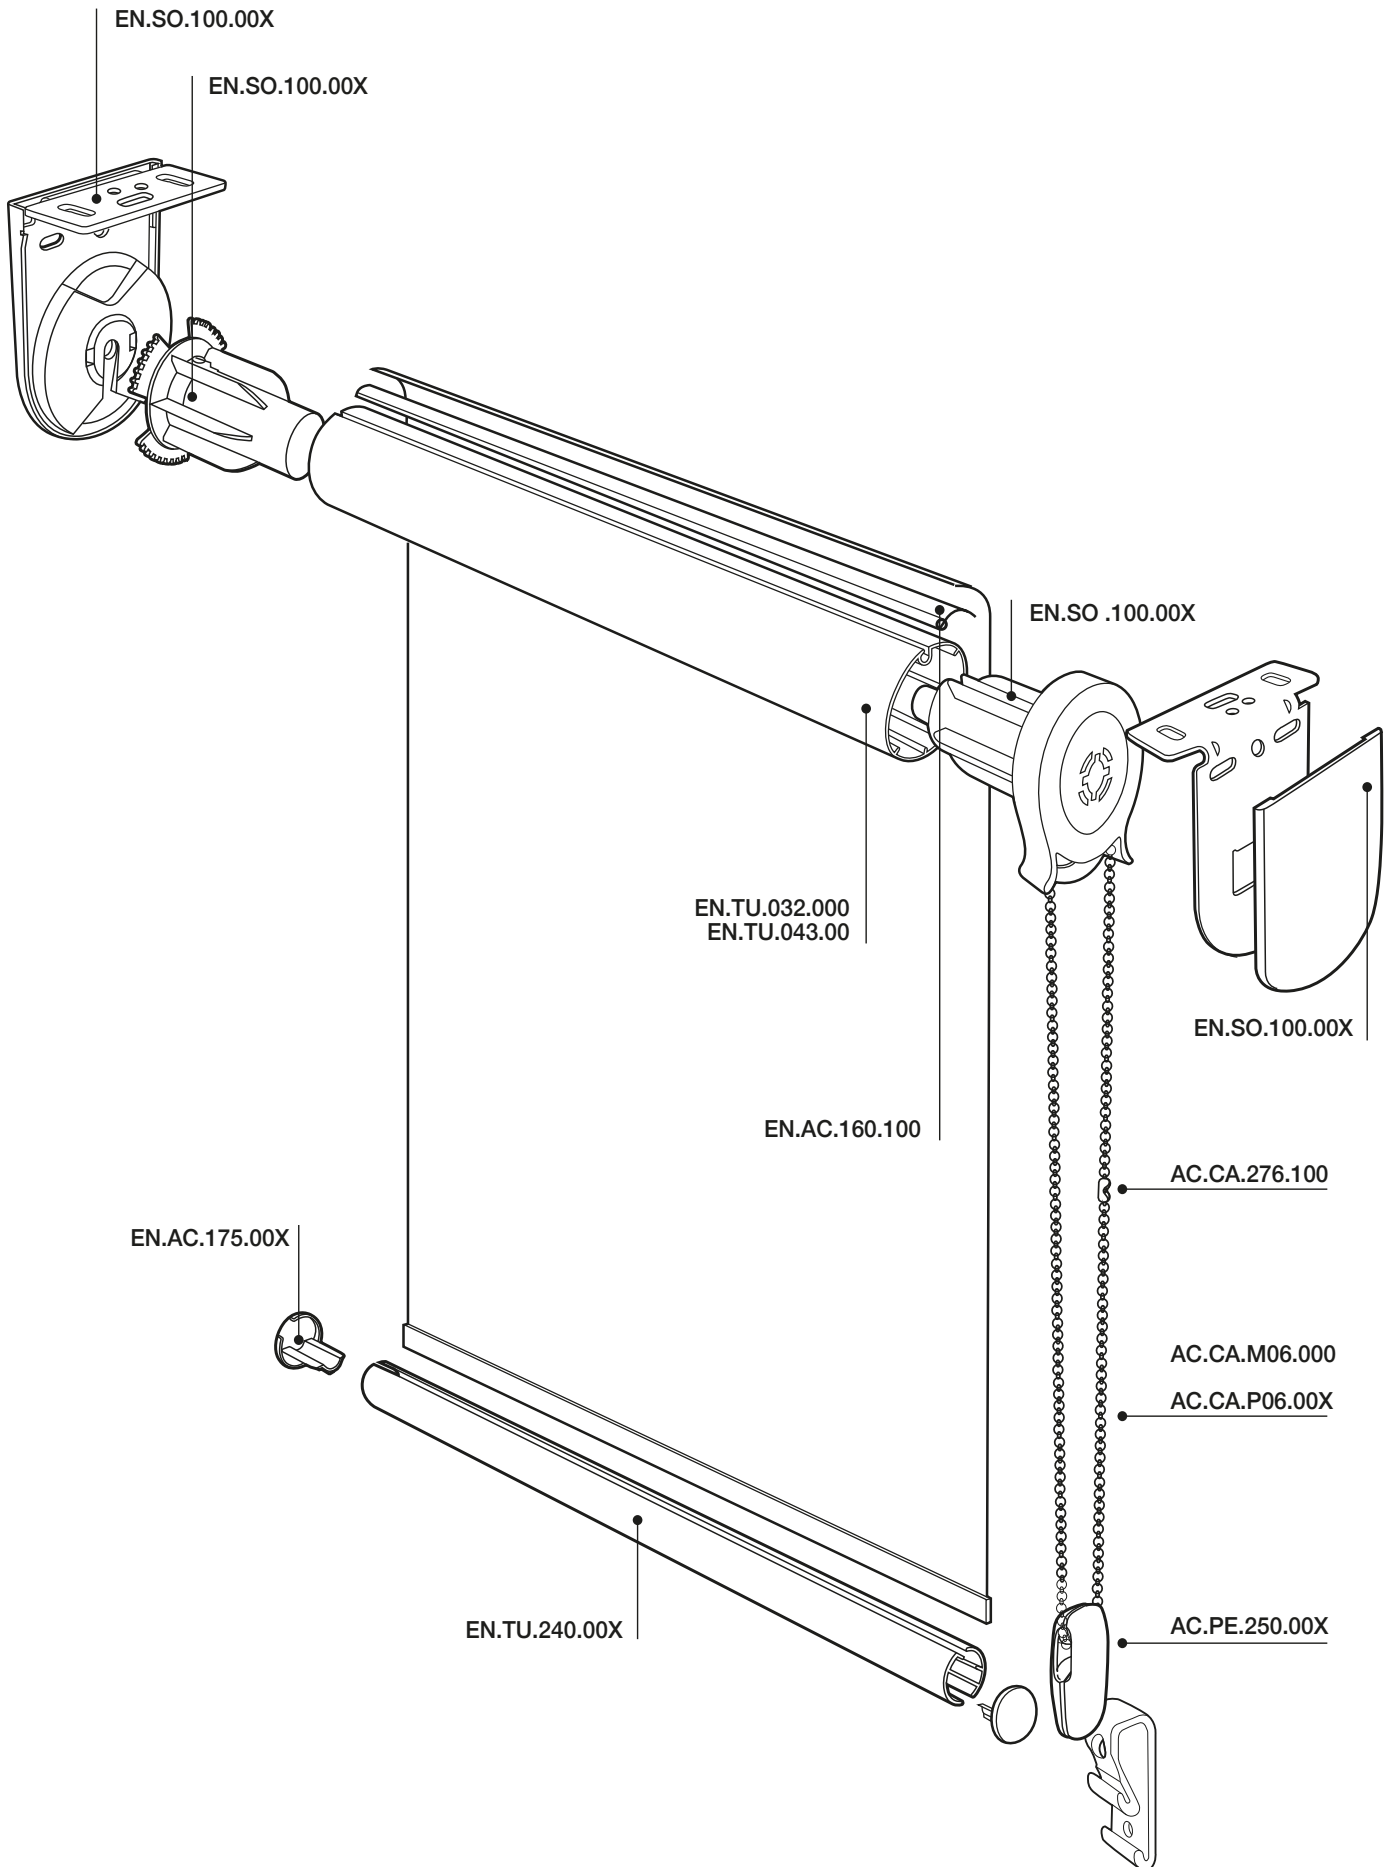


**SOFT 32 - 43 mm. 1:1**

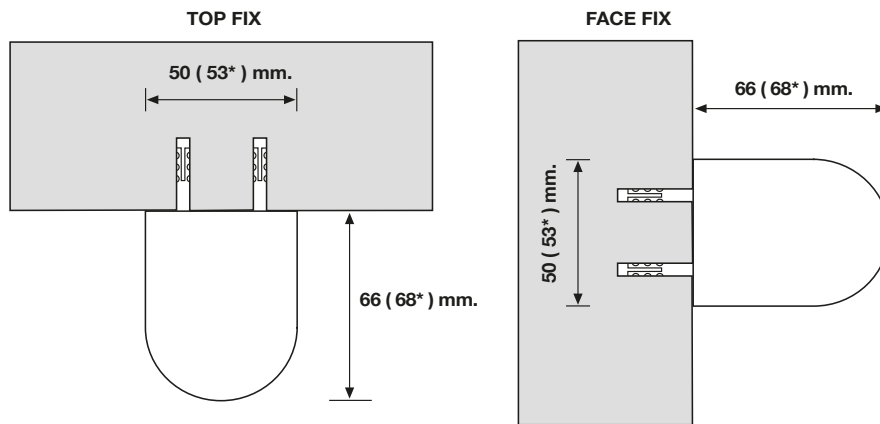

32 mm.

43 mm.

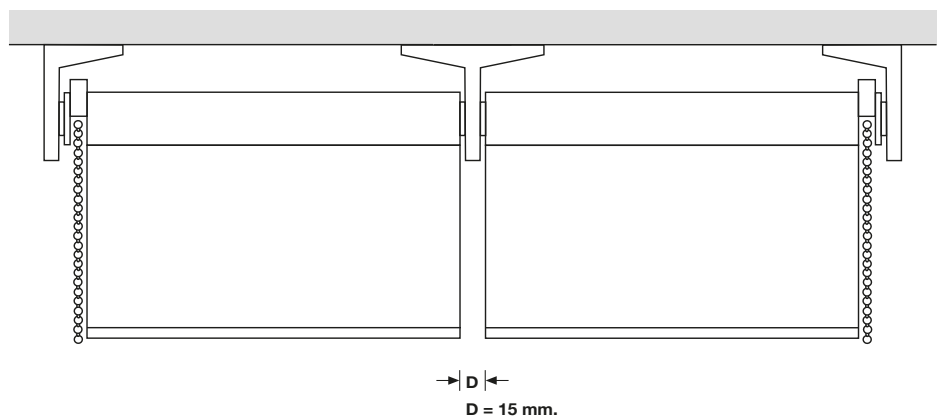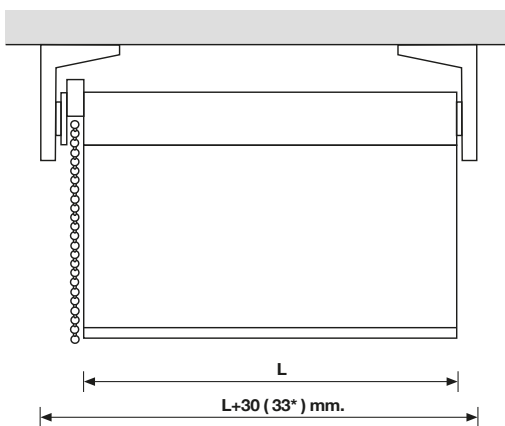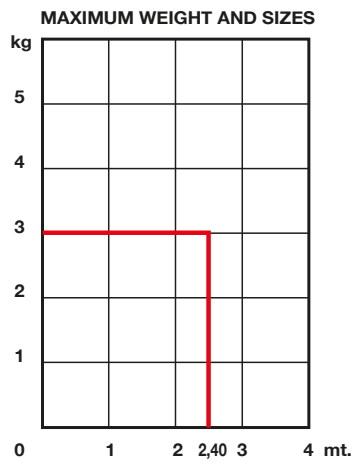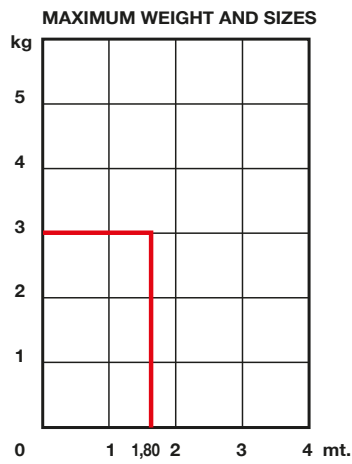


- L = Measure cut of tube
- \* Measure with cover
- D = Gap

# Soft




newblinds.co.uk


## OPTIONALS




GUIDE CABLE




ALU GUIDE

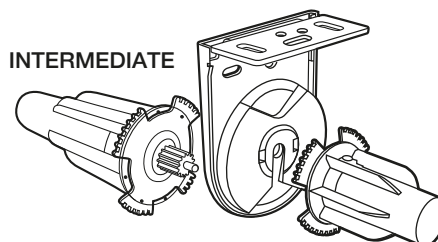


INTERMEDIATE

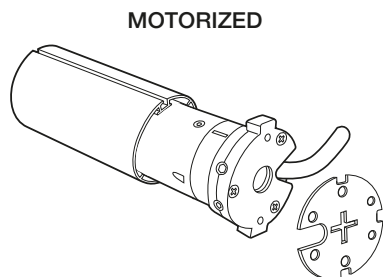

MOTORIZED



TOP BAR COVER

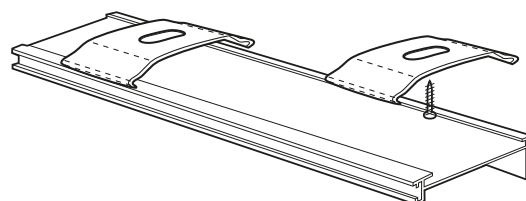

TOP BAR

### 32 mm ROLLING DIAMETER

FABRIC THICKNESS	OPAQUE 0.318	DARKTEX 0.5	ESSENCE 3% 0.62	DALIA 0.35	ALTEA 0.27	IRIS 0.23
DROP mt.						
1	38.3	41.5	43.7	38.8	37.5	36.6
1.25	39.6	43.3	45.6	40.2	38.5	37.6
1.5	40.9	45.1	48	41.6	39.6	38.5
1.75	42.1	46.9	49.4	42.7	40.7	39.4
2	43.4	48.8	51.7	44.2	41.8	40.3
2.25	44.5	50	53.4	45.3	42.8	41.3
2.5	45.6	51.9	55.3	46.7	42.6	42.2
2.75	46.6	53.3	56.9	47.7	44.7	43.1
3	47.7	54.8	59.1	49	45.6	44

### 43 mm ROLLING DIAMETER

FABRIC THICKNESS	OPAQUE 0.318	DARKTEX 0.5	ESSENCE 3% 0.62	DALIA 0.35	ALTEA 0.27	IRIS 0.23
DROP mt.						
1	48	50.6	52.7	48.5	47.3	46.9
1.25	49	52.1	54.1	49.6	48	47.8
1.5	50.1	53.9	55.9	50.8	49.1	48.3
1.75	51	55.1	58.4	51.9	49.9	49
2	52.3	56.6	59.3	52.8	50.7	49.7
2.25	53.1	57.9	61	54	51.6	50.4
2.5	54.2	59.4	62.7	54.9	52.4	51.1
2.75	54.8	60.5	64	55.9	53.2	51.8
3	55.9	62	65.6	57	54.2	52.5